


# TIME TO UPGRADE

Designed by pilots for pilots as the first clean-sheet, FAA type certified piston engine in almost half a century, the DHK family of engines are like nothing that has come before it, in terms of safety, efficiency and performance.

The DHK engine family is so elegantly simple, it defines a new era of general aviation power. Achieved 25,000 feet in our DHK180 equipped Cirrus SR20.

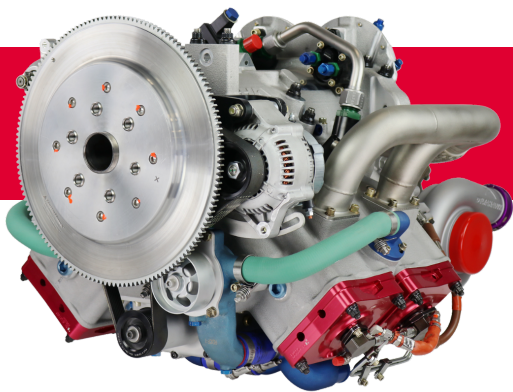

**SCHEDULE A VIDEO CALL**  
**MAKE A RESERVATION**

## OPERATIONAL PERFORMANCE ◀◀◀◀◀

MODEL	DHK180A4	DHK200A4	DHK235A4
HP (kW) @ MAX POWER	180HP (134.2kW)	200HP (149.1kW)	235HP (175.2kW)
MAXIMUM CONTINUOUS POWER HP (kW) @ 2600rpm	180HP (134.2kW)	200HP (149.1kW)	235HP (175.2kW)
FUEL CONSUMPTION @MAX POWER - gal/hr. @2600rpm	10.8 gal/hr. (40.9 L/hr.)	11.4 gal/hr. (43.2 L/hr.)	13.1 gal/hr. (49.6 L/hr.)
HP (kW) @ BEST ECONOMY- 2200rpm	135HP (100.7kW)	150HP(111.8kW)	188HP (140.2kW)
FUEL CONSUMPTION @BEST ECONOMY - gal/hr. @2200rpm	7.3 gal/hr. (27.6 L/hr.)	8.3 gal/hr. (31.4 L/hr.)	10.2 gal/hr. (38.6 L/hr.)
TORQUE ft-lbs (Nm) @ 2600rpm	363ft-lbs (492Nm)	404ft-lbs (547Nm)	474 ft-lbs (642Nm)

## SPECIFICATIONS ◀◀◀◀◀

ASPIRATION	COMPOUND BOOSTED - SUPERCHARGED/TURBOCHARGED w/ CHARGE AIR COOLER
ROTATIONAL	CLOCKWISE FROM PILOT'S PERSPECTIVE
WEIGHT - lbs (kg) est.	335 lbs.(151kg) - INCLUDES STARTER ALTERNATOR, TURBO, & EXHAUST SYSTEM
DISPLACEMENT - in <sup>3</sup> (liter)	202 in <sup>3</sup> (3.3L)
ENGINE TYPE	INVERTED VEE
NUMBER OF CYLINDERS	4
IGNITION TYPE	COMPRESSION IGNITION
FUEL TYPE	CERTIFICATION FUELS: JET A, JET A-1. WILL BURN JP5, JP8, SAF, #2 DIESEL
FUEL SYSTEM	DIRECT INJECTION - 4 INDEPENDENT PUMP LINE NOZZLE SYSTEMS
COMPRESSION RATIO	20:1 GEOMETRIC (~18:1 DYNAMIC)
MAXIMUM RPM	2600
OIL SYSTEM	SINGLE STAGE MECHANICAL GEAR PRESSURE/ TWO STAGE MECHANICAL GEAR SCAVENGE
SUPERCHARGER	BELT DRIVEN TWIN SCREW
INDUCTION	PISTON PORTED 2-STROKE PRESSURE SCAVENGED
COLD START CAPABILITIES	EXTERNAL BLOCK HEATER/INTEGRAL GLOW PLUGS - 24V (12V AVAILABLE AS OPTION)
OPERATIONAL TEMPERATURES °F (°C)	COLD START - DOWN TO -40°F (-40°C) W/SUPPLEMENTAL HEAT
STARTER	24V(12V OPTION) ELECTROMECHANICAL SOLENOID
ALTERNATOR	BELT DRIVE 24V - 60Amp (12V AVAILABLE AS OPTION)
COOLING	LIQUID COOLED - MAXIMA COOLANOL 50/50 BLEND
OIL GRADE	PRESSURE LUBRICATED - PHILIPS 66 VICTORY DIESEL 10W40
FIRING ORDER	1-2-3-4

DELTAHAWK ENGINES, INC. | 2300 SOUTH STREET | RACINE, WI 53404 | DELTAHAWK.COM | INFO@DELTAHAWK.COM | PHONE: 262-582-4500 | FAX:(815)-301-8154

© 2024 DeltaHawk Engines | ® DeltaHawk is a registered trademark of DeltaHawk Engines, Inc. | Other trademarks appearing in this document are the property of their respective entities. In keeping with DeltaHawk practice of continuous progress and product improvement, the right is reserved to make changes without notice